


±0.1	0.1	Ra
±0.2	0.2	▽
±0.3	0.3	▽
±0.5	0.5	▽
±0.8	0.8	▽
0.5~5	6.3	▽
6~30	1.6	▽
31~120	0.2	▽
121~320	0.25	▽
321~1000	0.2	▽
321~1000	0.2	▽

HAITIMA CORPORATION
 P.O.BOX 34-36 TAIPEI
 Tel:+886-2-26585800

E-mail:haitima@seed.net.tw
 www.haitima.com.tw

TAIWAN R.O.C.
 Fax:+886-2-26582266

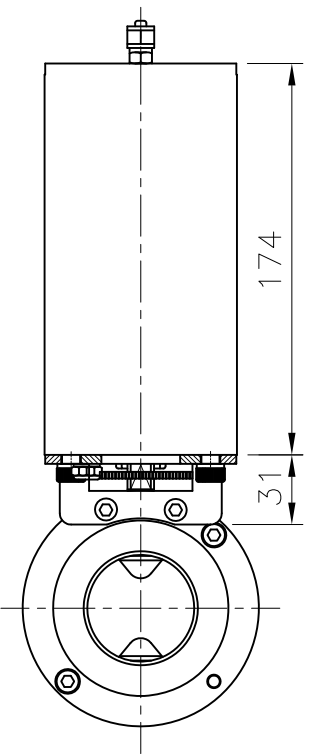

C3 Actuator Instruction

1. Shut-Off time: 1.5 second; Weight: 3.85 Kgs
2. Operating air pressure: 6 kg/cm² ; Min. 5 bar ; Max. 9 bar compress air
3. Air consumption: 0.266 Liter at 5 bar
4. Material: stainless steel AISI 304
5. Can be equipped with normal close or open.

C3 Operation instruction

1. C2 Actuator apply to butterfly valve in size 1"-3" of the disc head DIA. 12mm X 8mm.(other size can be require)
2. Signal transfer: Can be connect with M18 or M12 screw proximity switch (PNP or NPN)
3. Air/Air (double effect) actuator or air/spring (simple effect) actuator are available.
4. Accessories: adapter: 1pc ; M6 X 35 screw: 2pcs ; washer: 4pcs ; M6 nut: 2pcs ; 1/8PT quick coupler: 1pc



CHECK BY	DRAWING BY	DATE	SPECIFICATION	C3 Auto Control Actuator For Butterfly Valve
	<i>Louis</i>	Mar.24.2014	MATERIAL	SS 304
			PROCESS/Nr.	
			UNIT / SCALE	mm

△			
△			
△			
Revise	Description	Date	Approve
DRAWING NO. ACT-CSC3 - 14			